
IO-Link modules for Modbus TCP


8 IO-Link Master Channels ELMT-8IOL-L001



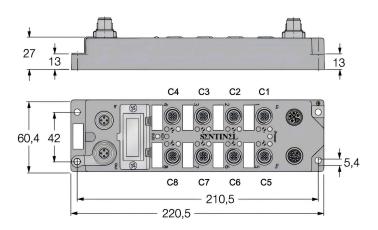


- Modbus TCP IO-Link Master
- Integrated Ethernet Switch
- Support 100Base-TX
- 2 x M12, 4-pin, D-code, Ethernet Fieldbus connection
- 8 IO-Link Master Channels
- IO_Link V1.1
- IO-Link Master Port Type Class A
- IO-Link master port M12 A code
- Metal connector with high-strength plastic housing
- Impact and vibration resistance
- Fully potted module electronics
- Protection class IP67

| Model | ELMT-8IOL-L001 | | | | | | |
|-----------------------------------|--|--|--|--|--|--|--|
| Supply voltage | 24VDC ± 10% | | | | | | |
| Operating current | < 200mA | | | | | | |
| Supply current | Recommended >8A | | | | | | |
| IO-Link port parameters | | | | | | | |
| Number of ports | 8 (C1C8) | | | | | | |
| Connectivity inputs | M12, A-coded, Female | | | | | | |
| Common IO pins | Not supported. The second hole needs to be left | | | | | | |
| | empty. | | | | | | |
| Port supply current | The maximum is 2A, which is the current | | | | | | |
| | provided by the first hole to the device. | | | | | | |
| | The total of C1C4 does not exceed 4A | | | | | | |
| | The total of C5C8 does not exceed 4A | | | | | | |
| IO–Link parameters | | | | | | | |
| SIO model | Not Supported, The 4th hole cannot be used as a | | | | | | |
| | normal I/O. | | | | | | |
| IO-Link Pin definition | Pin 4 in IOL mode | | | | | | |
| IO-Link Port type | Class A, The second hole needs to be left empty. | | | | | | |
| IO-Link specification | V1.1 | | | | | | |
| Frame type | Supports all specified frame types | | | | | | |
| Support Device | Maximum 32Bytes Input / 32Bytes Output | | | | | | |
| Transmission rate | 4.8kbps(COM1) / 38.4kbps(COM2) / | | | | | | |
| | 230.4kbps(COM3) | | | | | | |
| Modbus-TCP | | | | | | | |
| Number of communication interface | 2 | | | | | | |
| Transmission standard | 100Base-TX | | | | | | |
| Auto-negotiation | Supported | | | | | | |
| Auto-MDI/MDIX | Supported | | | | | | |
| Maximum transmission rate | 100Mbit/s | | | | | | |
| Connector | M12, D-coded, Female | | | | | | |
| Default IP address segment | 192.168.0.* | | | | | | |
| IP address setting function | support DHCP | | | | | | |
| Default subnet mask | 255.255.255.0 | | | | | | |
| Communication data format | Binary | | | | | | |
| Cycle time range | 2ms-2000ms | | | | | | |
| Operating temperature | –20–55°C | | | | | | |




Note: U_B is the module power supply, and U_L is the load power supply Note: U_L is not used inside the module, so it is unnecessary to connect it U_I to U_I is directly connected


IO-Link Port Connector M12



Bus Connector M12





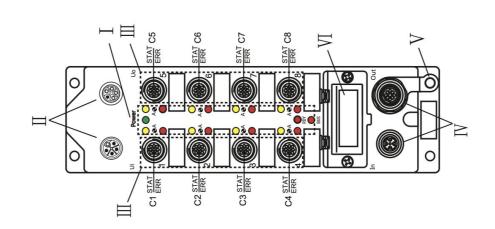

| Area Code | Project | Description | | | | | | | | | |
|--------------|-----------------|---|---|--|--|--|--|--|--|--|--|
| | | LED name | Detail | | | | | | | | |
| | | Power | Green LED lights: ON: The module power supply (U _b) OFF: The module power supply is disconnected | | | | | | | | |
| | Module | BUS | Green LED lights: ON: Modbus-TCP Communication is normal Red LED lights: ON: Modbus-TCP Communication interruption; Flashing: In DHCP mode, waiting for IP assignment | | | | | | | | |
| I | LEDS | RDY | Red LED lights: ON: IO-Link There is an error in the port, which is inconsistent with the configuration; | | | | | | | | |
| | | STAT | Yellow LED lights: The IO-Link communication status of the port (C1-C8) ON: The IO-Link communication is normal; OFF: The IO-Link communication is not established; | | | | | | | | |
| | | ERR | Red LED lights: Working state of the port ON: The port is working abnormally; please check the IO-Link cable or the IO-Link port settings in the dial code OFF: There is no abnormality in this port; IO-Link is communicating normally or this port is closed or disabled during the dial switch. | | | | | | | | |
| II | Power Supply | | nput, L-coded, 5-pin, male y output, L-coded, 5-pin, female | | | | | | | | |
| III | IO-Link PORT | 1. M12 A-coded, 5-pin, external signals can be 2. In the figure, which ERR represents the wor For example:C1 STAT/EI LED below is ERR; For d 3. Totally is 8 IO-Link pror class B device; | female; Pin 4 is IO-Link, Dose not support SIO, i.e., Standard I/O mode; Pin 2 is empty, no connected; port does C* represent; The STAT represents the communication status indicator lamp; The king status indicator lamp; RR represents that the port is PORT1, The LED above the right of the port is STAT and the letailed information on the indicator lights, please refer to Area Code I; ort class A, every port is independent lamp for START&ERR. External power supply is required | | | | | | | | |
| IV | BUS | In (left): Modbus-TCP | port in the profinet configuration when not used, try not let the module have a red light; Bus in, M12 D-Code, 5-pin, female P Bus out, M12 D-Code, 5-pin, female | | | | | | | | |
| V | PE | Ground | . 200 000,22 2 0000, 9 pm, remain | | | | | | | | |



| | | ACTZ | VI Enlarged Drawing PORT L STATION ADDR L ACT1 | | | | | | | | |
|----|----------------|---|--|--|--|--|--|--|--|--|--|
| | | LINK2 | Bus in Green LED lights: ON: The communication rate of this port is 100M; | | | | | | | | |
| | Network | ACT2 | OFF: The communication rate of this port is not 100M; Bus in Yellow LED lights: ON: This establishes a physical connection; OFF: No connection; Flashing: There is data exchange; | | | | | | | | |
| | Status LEDS | LINK1 | Bus out Green LED lights: ON: The communication rate of this port is 100M; OFF: The communication rate of this port is not 100M; | | | | | | | | |
| | | Bus in Green LED lights: ACT1 ON: This establishes a physical connection; OFF: No connection; Flashing: There is data exchange; | | | | | | | | | |
| | | | of the hexadecimal address; ADDR_L is the low bit of the hexadecimal address; the ns of different dial codes are as follows: | | | | | | | | |
| VI | IP Address | 0xFF DHCP mode, waiting for IP allocation after power on | | | | | | | | | |
| •• | | 0x00 | Run according to the last DHCP assigned IP address | | | | | | | | |
| | Settings | 0x01 - 0xFE | 0x01 - 0xFE Set the 4th digit of the IP address. The first 3 digits of the network segment are assigned by DHCP. | | | | | | | | |
| | | | is A, ADDR_L is 9, then ADDR is 0xA9, and the IP address is: *.*.*.169; changed, it will take effect after power is turned on again | | | | | | | | |
| | | | PORT_L: 0x00: open and close the IO-Link port according to the "configuration data"; ose the IO-Link port according to the "dial code" (as shown below) | | | | | | | | |
| | IO-Link | Rotary Code | PORT H PORT L | | | | | | | | |
| | Port | Port | 8 7 6 5 4 3 2 1 | | | | | | | | |
| | vacant | C6, and close other po | 0x02; PORT_L: 0x05; the corresponding binary is: 0010 0101 represents: open ports C1, C3, rts; changed, it will take effect after power is turned on again | | | | | | | | |



IO-Link Port Byte Mapping

| 1.IO-Link Configuration Data (Occupy 133 Word), Support function code F04 (read input register) | | | | | | | | | | | | |
|---|--------------|-----------------|--|----|--------|--------|-------|--------|-------|----|-------|--|
| Modbus | Modbus | IO Link DVTF | Description | | | | | | | | | |
| Reference Number | Data Address | IO-Link BYTE | Description | | | | | | | | | |
| | | | 8 bits represent the current IO-Link status of 8 ports: 1 is normal communication, 0 is no communication | | | | | | | | | |
| | | Byte0 | Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| | | | Port | C8 | C7 | C6 | C5 | C4 | С3 | C2 | C1 | |
| 30001 | 0 | Byte1 | 8 bits rep 1 means Bit Port | | | | | | | | orts: | |
| 20002 | _ | Byte2 | C1 Port disconnection times | | | | | | | | | |
| 30002 | 1 | Byte3 | C2 Port disconnection times | | | | | | | | | |
| 20002 | • | Byte4 | C3 Port disconnection times | | | | | | | | | |
| 30003 | 2 | Byte5 | C4 Port disconnection times | | | | | | | | | |
| 30004 | 2 | Byte6 | C5 Port disconnection times | | | | | | | | | |
| 30004 | 3 | Byte7 | C6 Port disconnection times | | | | | | | | | |
| 30005 | 4 | Byte8 | C7 Port disconnection times | | | | | | | | | |
| 30003 | 4 | Byte9 | C8 Port disconnection times | | | | | | | | | |
| 30006-30021 | 5-20 | Byte10-Byte41 | | C1 | Port p | rocess | input | data (| 32Byt | e) | | |
| 30022-30037 | 21-36 | Byte42-Byte73 | | C2 | Port p | rocess | input | data (| 32Byt | e) | | |
| 30038-30053 | 37-52 | Byte74-Byte105 | C3 Port process input data (32Byte) | | | | | | | | | |
| 30054-30069 | 53-68 | Byte106-Byte137 | C4 Port process input data (32Byte) | | | | | | | | | |
| 30070-30085 | 69-84 | Byte138-Byte169 | C5 Port process input data (32Byte) | | | | | | | | | |
| 30086-30101 | 85-100 | Byte170-Byte201 | C6 Port process input data (32Byte) | | | | | | | | | |
| 30102-30117 | 101-116 | Byte202-Byte233 | C7 Port process input data (32Byte) | | | | | | | | | |
| 30118-30133 | 117-132 | Byte234-Byte265 | C8 Port process input data (32Byte) | | | | | | | | | |



2.IO-Link Process Data Output (Occupy 128 Word), Support function codes F03 (read holding register), F16 (write holding register) register), F23 (read and write holding register)

| _ | | | | | | | | |
|----------------------------|------------------------|-----------------|--------------------------------------|--|--|--|--|--|
| Modbus Reference Number | Modbus Data Address | IO-Link BYTE | Description | | | | | |
| 40001-40016 | 0-15 | Byte10-Byte31 | C1 Port process output data (32Byte) | | | | | |
| 40017-40032 | 16-31 | Byte32-Byte63 | C2 Port process output data (32Byte) | | | | | |
| 40033-40048 | 32-47 | Byte64-Byte95 | C3 Port process output data (32Byte) | | | | | |
| 40049-40064 | 48-63 | Byte96-Byte127 | C4 Port process output data (32Byte) | | | | | |
| 40065-40080 | 64-79 | Byte128-Byte159 | C5 Port process output data (32Byte) | | | | | |
| 40081-40096 | 80-95 | Byte160-Byte191 | C6 Port process output data (32Byte) | | | | | |
| 40097-40112 | 96-111 | Byte192-Byte223 | C7 Port process output data (32Byte) | | | | | |
| 40113-40128 | 112-127 | Byte224-Byte255 | C8 Port process output data (32Byte) | | | | | |

| Correspondence between words and bytes: | | | | | | | | | | | | | | | | |
|---|--|----|----|----|----|----|---|---|---|--------|---------|------|---|---|---|---|
| Default byte order | IO-Link data byte 0 BYTE 0 high byte IO-Link data byte 1 | | | | | | | | | 1 BYTE | 1 low l | oyte | | | | |
| Word (bit) | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |